

Mallorquina system

Counter- window system consisting of fixed or adjustable louvres.



Mallorquina system

Transmittance

Thermal resistance of the counterwindow and the thermal chamber $\Delta R = 0,08$ (m²K/W)

Uw (W/m ² K)	Uws (W/m ² K)
0.8	0.75
1.0	0.93
1.2	1.09
1.4	1.26
1.6	1.42
1.8	1.57
2.0	1.72
2.2	1.87
2.4	2.01
2.6	2.15
2.8	2.29
3.0	2.42
3.2	2.55

Uw window transmittance

Uws transmittance of the window-counterwindow assembly

Calculations according to EN ISO 10077-1:2000

Wind loading resistance

(UNE 13659:2004): CLASS 5

Test reference 1,50 x 1,50 m. 2 sashes

Finishes

Colour powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized




Sections

Frame 40 mm.
Sash 48 mm.

Profile thickness

Window 1,3 mm.
Door 1,4 mm.

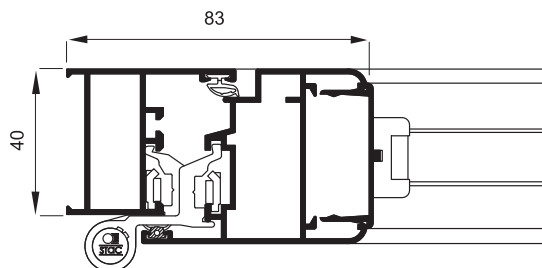

Opening possibilities



Practicable 1, 2, 3 & 4 sashes
Folding

Maximum dimensions

Width (L) = 1.600 mm.
Height (H) = 2.500 mm.
single sash window. Practicable

Please consult regarding maximum weight and dimensions for other opening types

Maximum weight/sash

100 Kg.