


Mediterranean Balcony Sliding

A single or dual rail sliding balcony system with fixed lights and sashes. There is a hidden rail in the fixed zone and a straight style in the frame and sash.

Thanks to its large glazing capacity of up to 34 mm, it guarantees a high degree of sound proofing.

The sash and frame are perimetral.

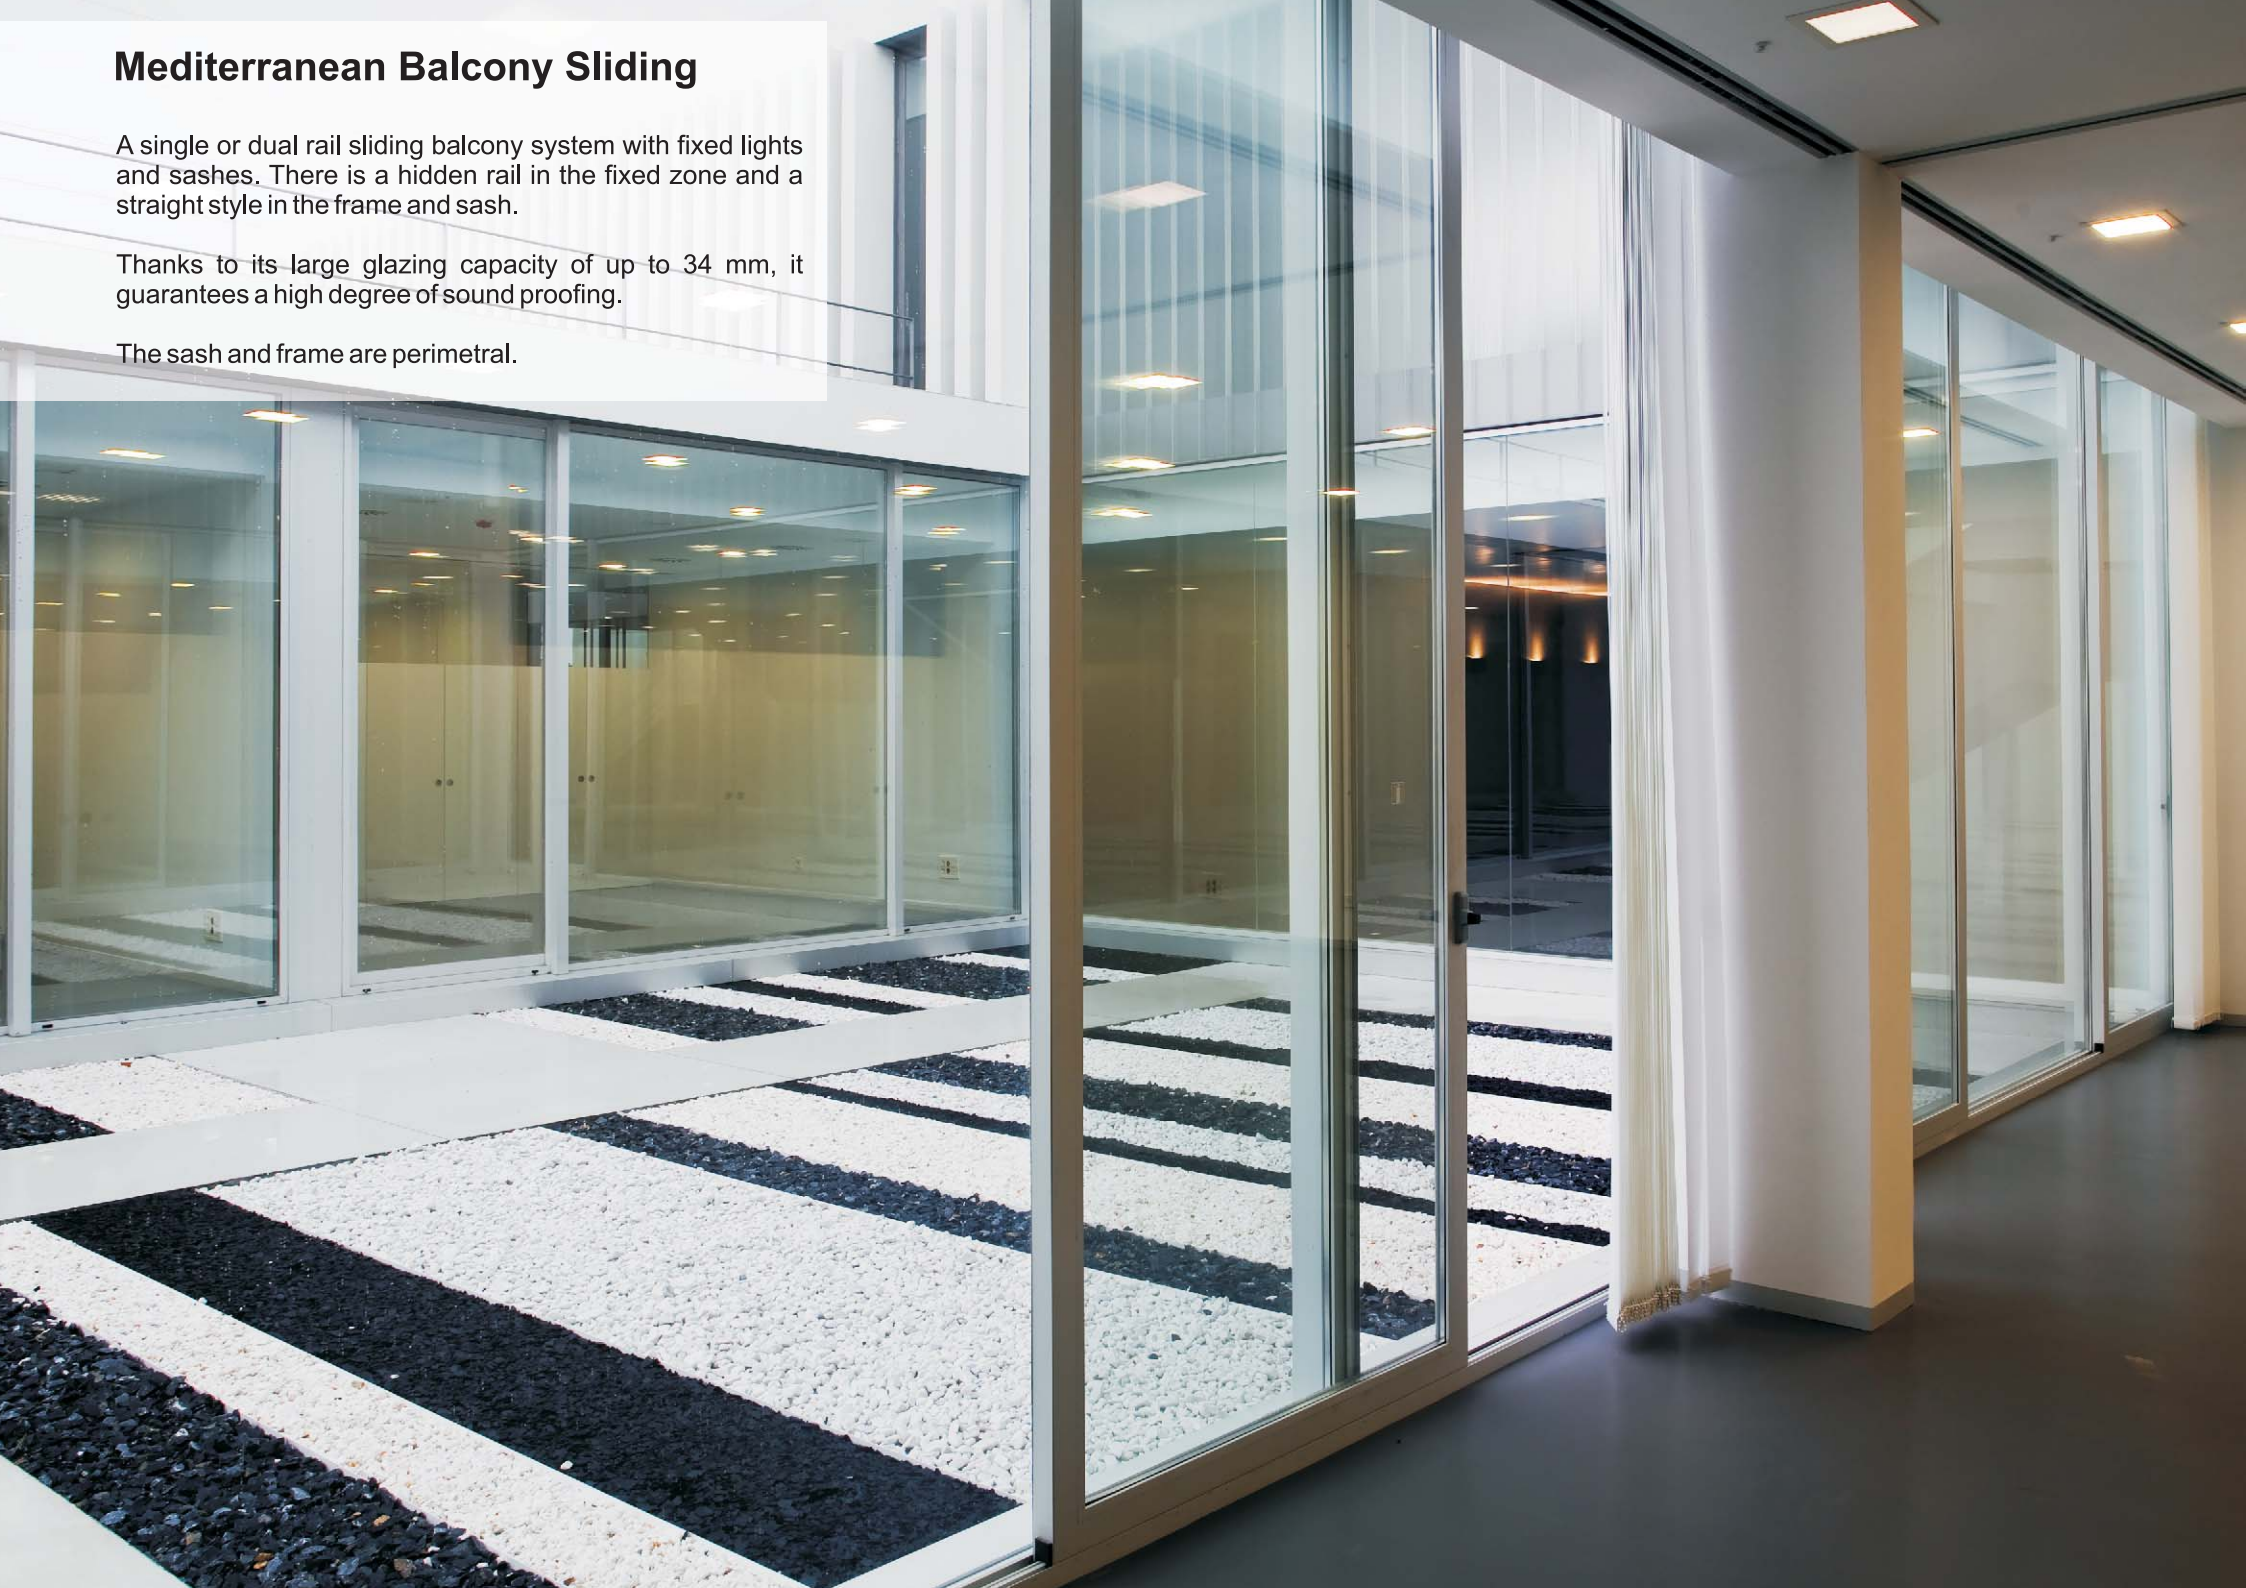

Mediterranean Balcony Sliding

Transmittance

Uw from 2,1 (W/m²K)

Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 30 mm.

Maximum acoustic insulation **Rw=35 dBA**

Finishes

Colour powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

Categories achieved at test centre

Air permeability
(EN 12207:2000): Class 3

Water tightness
(EN 12208:2000): Class 8A

Wind resistance
(EN 12210:2000): Class C4
Reference test 1,49 x 1,24 m. 1 sash + 1 fixed light






Sections


Frame 106 mm.
Sash 45 mm.

Profile thickness

Balcony 1,5 mm.

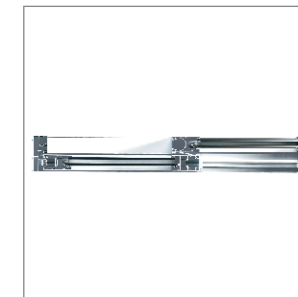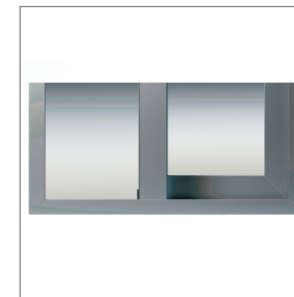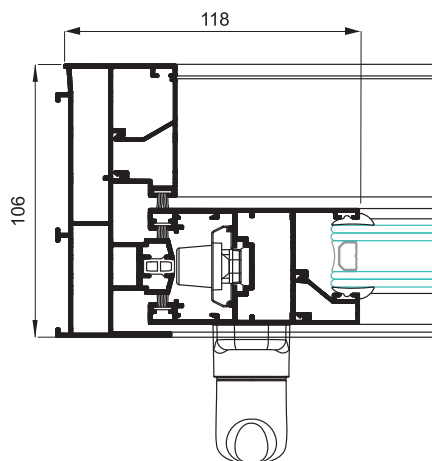

Opening possibilities

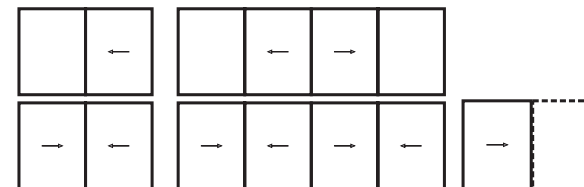

Single rail:

- 1 sash + 1 fixed light
- 2 sashes + 2 fixed lights

Dual rail 2 & 4 sashes

Galandage 1 & 2 sashes

Maximum dimensions

Width (L) = 4.400 mm.

Height (H) = 2.600 mm.

Balcony 1 sash + 1 fixed light

Maximum weight/sash

240 Kg.

Please consult regarding maximum weight and dimensions for other opening types